

## Fitting Instructions

# SmartKits SKs

## DOUBLE SWITCH

**The ignition has to be in off position**



**Remove the handle and the door pocket using Torx 20 and Torx 25 screwdrivers.**



**Pull the bottom of the door card away from the door, you will hear the clips coming undone. Side the door card forward to remove**



**In the passenger door, unplug the window switch and pull out the connector**




**Cut the Black and Green wire**

**Connect the Device.**

**[www.SmartKits.net](http://www.SmartKits.net)**

# SmartKits SKs

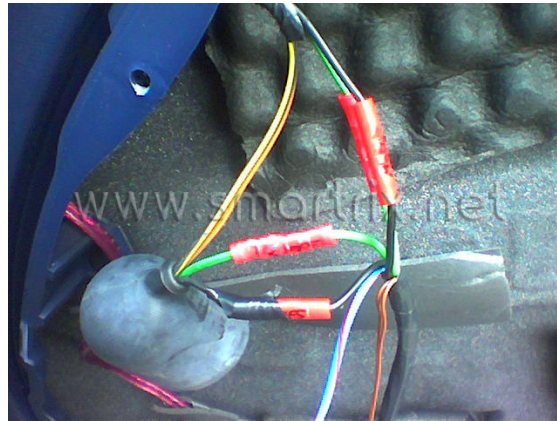

Symbols – P : Switch Connector – M : Window Motor

- Connect the Green wire to Switch Connector of the Green wire “P” to Device
- Connect the Black wire to Switch Connector of the Black wire “P” to Device
- Connect the Green wire to Window Motor of the Green wire “M” to Device
- Connect the Black wire to Window Motor of the Black wire “M” to Device
- STRIP (NO CUT) the Yellow-Black wire and connect the Blue wire



Place the Brown wire of the Device in the passenger door to the driver door.




In the drive door, unplug the window switch and pull out the connector

# SmartKits SKs



**Make the hole (20 mm) for the second switch**

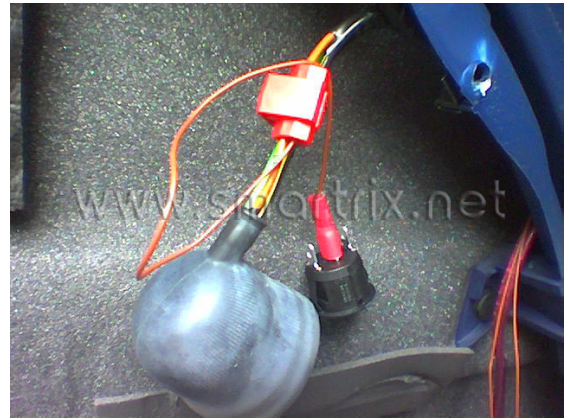

**Strip the Brown wire to Switch Connector and connect the Brown wire of the center pin of the second switch. Connect the two brown wires to the pin side of the second switch**

## Test

**Connect the 3 switches and position the Ignition in ON position and test the original and second switch**



**Climb on the handle and the door pocket using Torx 20 and Torx 25 screwdrivers.**